

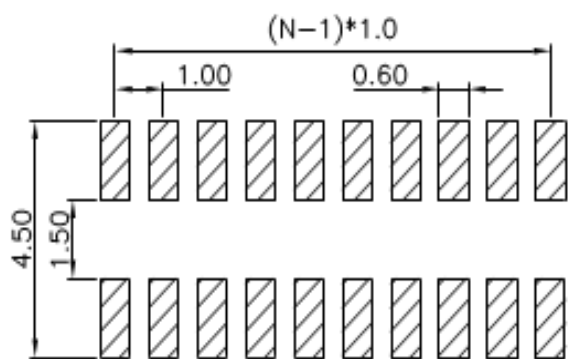



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/24/09	~	

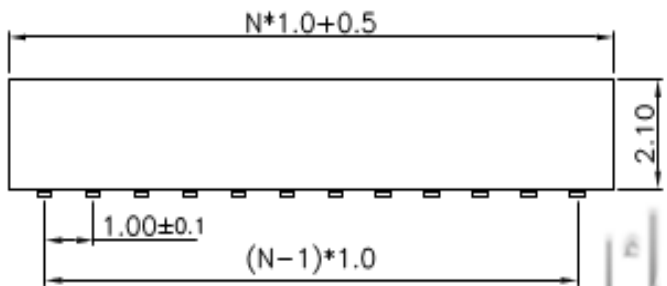

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)

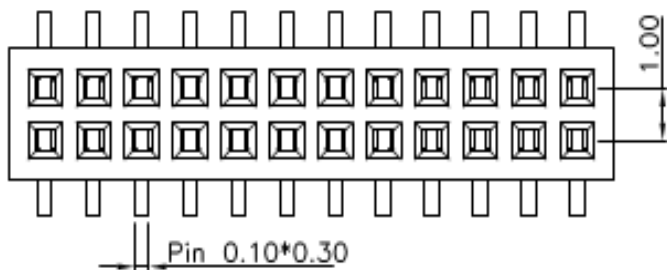

NOTES:

- SPECIFICATIONS
 - Current Rating: 1.0A
 - Insulation Resistance: 500MΩ Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 20mΩ Max
 - Operating Temperature: -45°C to +110°C
- MATERIALS:
 - Housing: High temperature, Nylon-46
 - Contact: Copper alloy
- PRODUCT NUMBER CODE:

YE1065-11 - X X X X X

 - PACKING TYPE
T:TRAY
R:TAPE ON REEL
B:TUBE
 - PICK UP SUPPORT
S:W/ PICK UP
X:W/O PICK UP
 - HOUSING COLOR
B:BLACK
 - CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
 - No.OF CONTACTS
2*2-2*40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	1.0mm FEMALE HEADER SMT TYPE W/O POST	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		SHEET SIZE	A4	SERIES	YE1065-11
SCALE		1:1		SHEET		1 OF 1	
DRAWING NO.		C-YE1065-11-XXXXX					

شركة يكتا الكترونيك

