

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/06/05'		

NOTES:


- MATERIAL
 - INSULATOR:PA-46(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: YE 1029-05



4. PRODUCT NUMBER CODE:

YE1029-05 - X X X X X X


- DIM.A B H1 H2 TYPE
1: TYPE 1
- MOUNTING TYPE
R: RIGHT ANGLE TYPE
- HOUSING COLOR
B:BLACK
- CONNECTOR PLATING
8: FULL GOLD FLASH
- CONNECT TYPE
P:PLUG
- No.OF CONTACTS
2*1-2*40

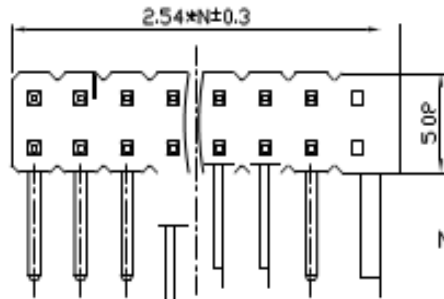

N: NUMBER OF CONTACTS/2

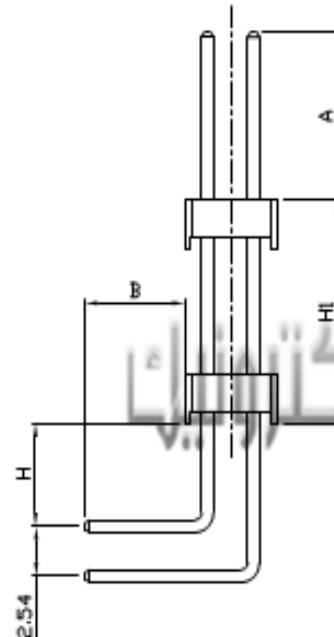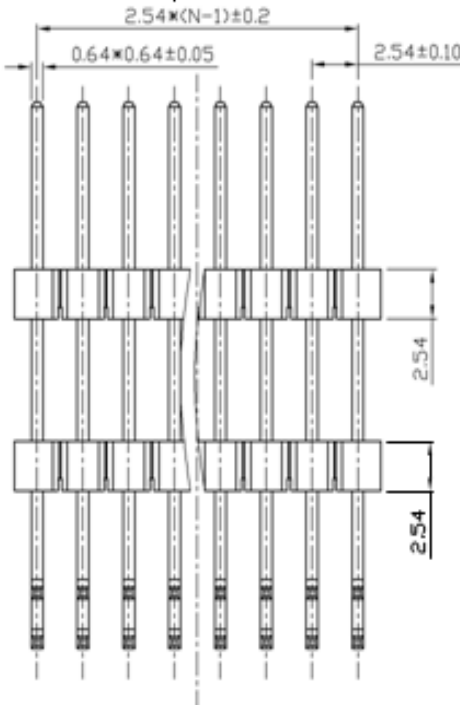

TYPE	DIM A	DIM B	DIM H1	DIM H	PIN LENGTH
1	8.60	5.50	11.37	5.25	31.50 26.40
2					
3					
4					
5					
6					



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	2.54mm PITCH PIN HEADER DUAL ROW RIGHT ANGLE	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE				CUSTOMER			
SCALE		1:1		SHEET		1 OF 1	
DRAWING NO.		C-YE 029-05-XXXXXX					
				SHEET SIZE		A4	
				SERIES		YE1029-05 SERIES	

شركة يكتا الكترونك

