
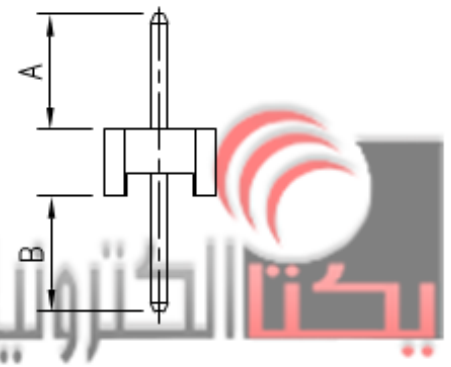
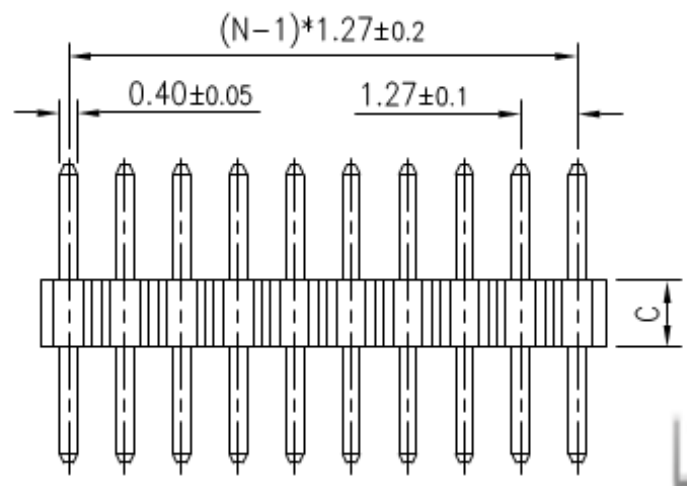


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/11/07'		

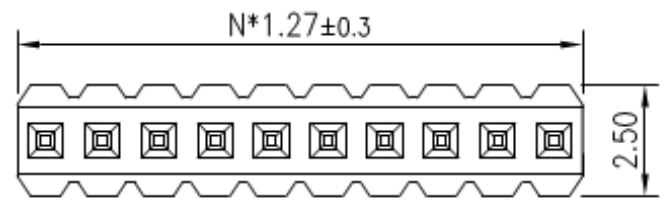

- NOTES:
- MATERIAL
 - INSULATOR:PA-46 (UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:500MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
 - PRODUCT NUMBER CODE:

YE1031-01 - X X X X X X X X

DIM.A B TYPE
1: TYPE 1

HOUSING HEIGHT(DIM. C)
1: 1.00mm
2: 1.50mm
3: 2.00mm

MOUNTING TYPE
V: VERTICAL TYPE

HOUSING COLOR
B:BLACK

CONTACT PLATING
8: FULL GOLD FLASH

CONNECTOR TYPE
P:PLUG


No.OF CONTACTS
1*1-1*40

N:NUMBER OF CONTACTS

TYPE	DIM A	DIM B
1	2.60	2.60
2		
3		
4		
5		
6		
7		
8		
9		

18		
19		
20		
21		
22		
23		
24		
25		

10		
11		
12		
13		
14		
15		
16		
17		

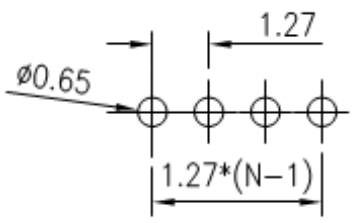

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	1.27mm PITCH PIN HEADER SINGLE ROW STRAIGHT
X. ±0.60	X. ±5'	UNITS mm	SHEET SIZE A4	SERIES YE1031-01 SERIES
.X ±0.38	.X ±3'			
.XX ±0.25	.XX ±2'			
DRAWING TYPE	CUSTOMER	شركة يكتا إلكترونيك 		
SCALE	1:1 SHEET 1 OF 1			
DRAWING NO.	C- YE1031-01-XXXXXXX			