

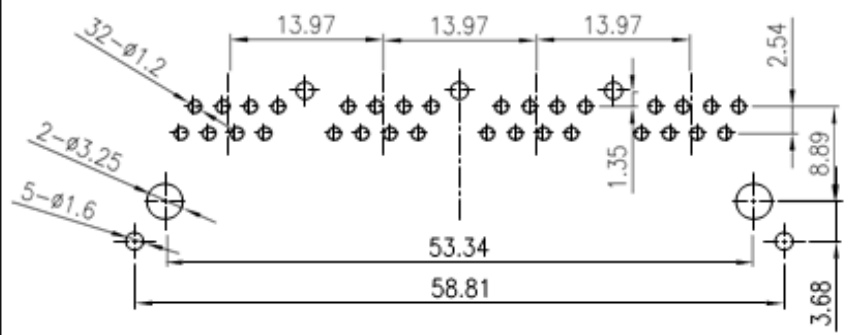
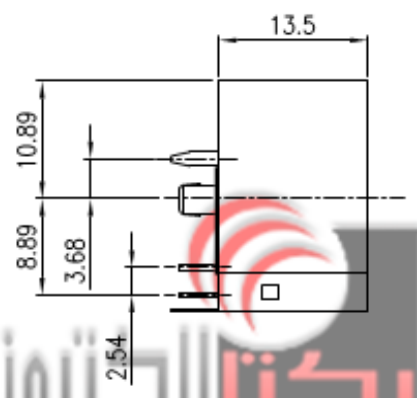
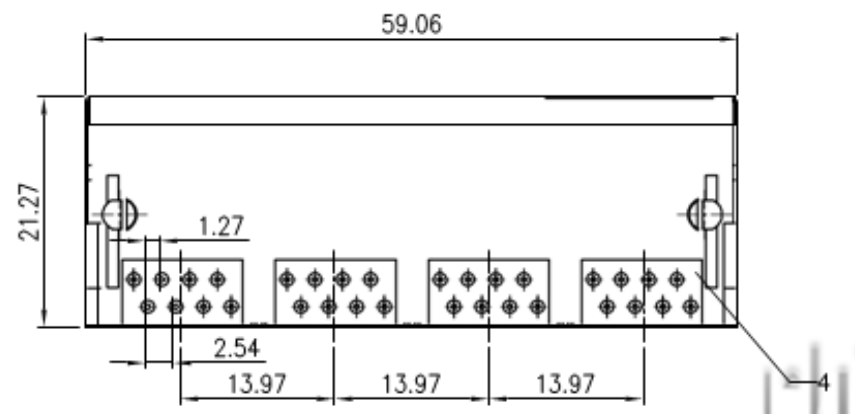


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	L/H 03/26/06		

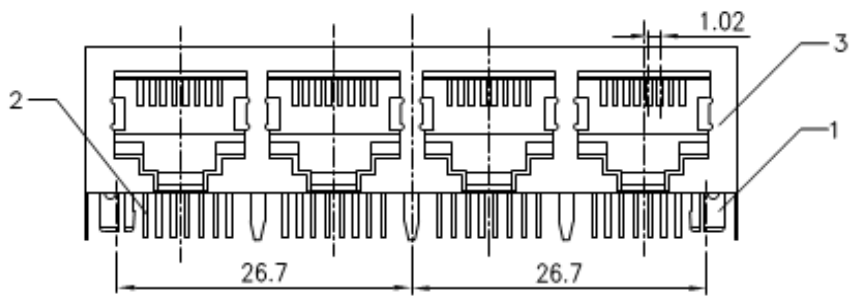

SPECIFICATION

- Insulation Resistance: 1000MΩ Min.
 - Withstand Voltage: 500V AC/Minute.
 - Durability: 600 Cycles Min.
 - Product Number Code:
YE1129-X X X X X
- Housing Materials
P:PBT
N:NYLON
 - Housing Color
B:Black
 - Contact Plating
0:Gold Flash
3:Selective 3u" Gold (6;15;30)Micro Inch
 - No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
 - Connector Type
S:Socket
 - Series No.
YE1129

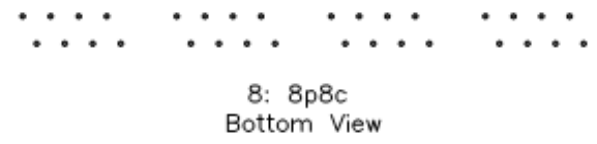

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

(4)	COVER	4	PBT OR NYLON	UL94 V-0 OR 94 V-2
(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.25mm THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD PLATING OVER NICKEL
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	QTY	MATERIAL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'
DRAWING TYPE		CUSTOMER	
SCALE		1:1 SHEET 1 OF 1	
DRAWING NO.		C- YE1129-XXXXXX	

PROJECTION		TITLE	PCB JACK 8P 4PORT
UNITS	mm	SERIES	YE1129 SERIES
SHEET SIZE	A4		

شركة يكتا الكترونيك

