
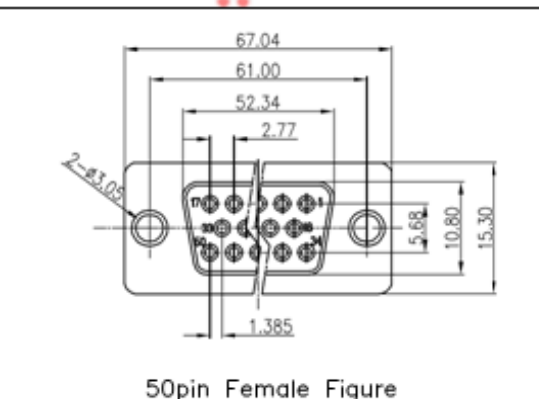


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/15/10'	~	

Dimension  $\begin{matrix} \oplus \\ \ominus \end{matrix}$

P I	A 02	P 02	C 03	D
9	17.90	21.99	30.80	16.33
15	26.50	33.32	39.11	21.66
25	10.00	17.01	53.01	38.38
37	56.50	63.50	69.32	51.81

- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 20mΩ Max. INITIAL
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
    - INSULATION RESISTANCE: 1000MΩ Min.
  - ENVIRONMENT CHARACTERISTICS:
    - TEMPERATURE RANGE: -45°C~+105°C.
  - PART NUMBER: YE1033-11
  - PRODUCT NUMBER CODE: YE1033-11 X X X X X X X

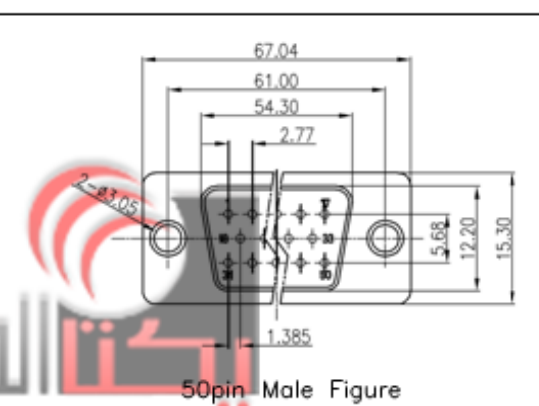

- SCREW DIM. A  
S: Standard(W/O nut)  
1: 5.00  
2: 3.00  
3: 5.20  
4: 4.80  
5: 5.80  
6: 4.00
- SCREW TYPE  
S: Standard(W/O nut)  
1: CC TYPE  
2: CS TYPE
- CONTACT PLATING  
B: FULL GOLD FLASH  
C: FULL 3u" GOLD  
J: Full 5u" GOLD
- SHELL PLATING  
T: FRONT & BACK SHELL Tin  
N: FRONT SHELL Nickel, BACK SHELL Tin
- HOUSING COLOR  
B: BLACK  
W: WHITE  
U: BLUE
- CONNECTOR TYPE  
M: Male  
F: Female
- No. OF CONTACTS  
09: 9pos.  
15: 15pos.  
25: 25pos.  
37: 37pos.  
50: 50pos.

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C: YE1033-11-XXXXXX		

PROJECTION	TITLE
$\begin{matrix} \oplus \\ \ominus \end{matrix}$	D-SUB SOLDER (MACHINE PIN)TYPE
UNITS	mm
SHEET SIZE	A4
SERIES	YE1033-11 SERIES