
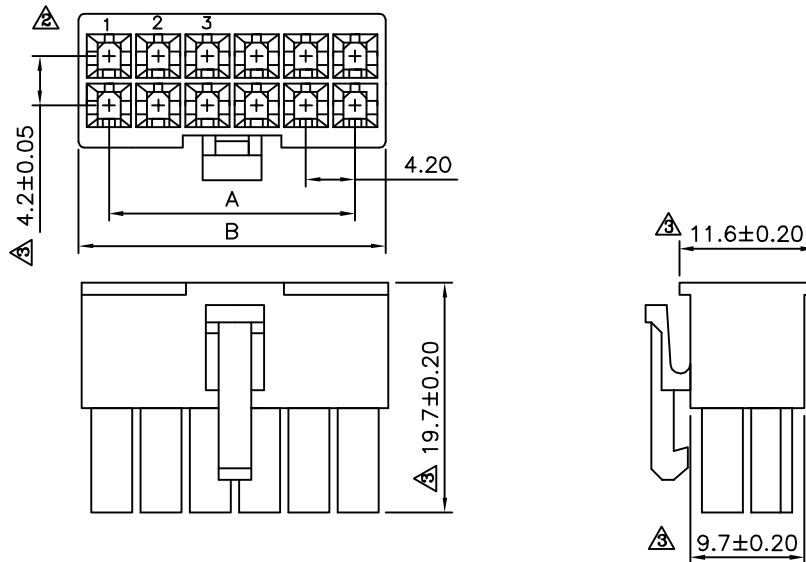
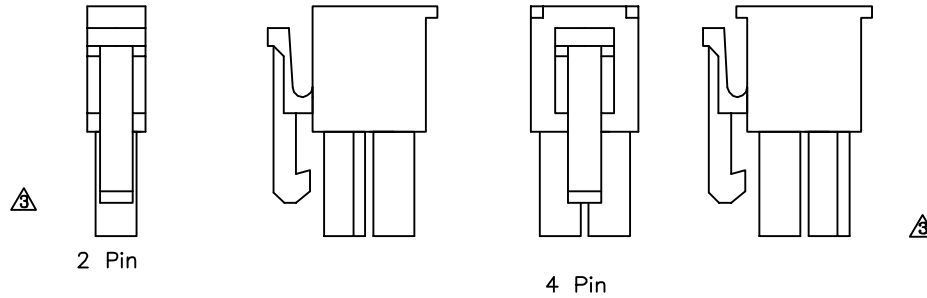


SPECIFICATION

- ⚠ Current Rating:7A AC/DC
- ⚠ Voltage Rating:250V AC/DC
- ⚠ Insulation Resistance:1000 Megaohms Min.
- ⚠ Withstand Voltage:1500V AC/Minute
- ⚠ Temperature Range:-25°C~+120°C
- ⚠ Insulator:PA66(UL94V-2),Nature
- ⚠ RoHS Compliant

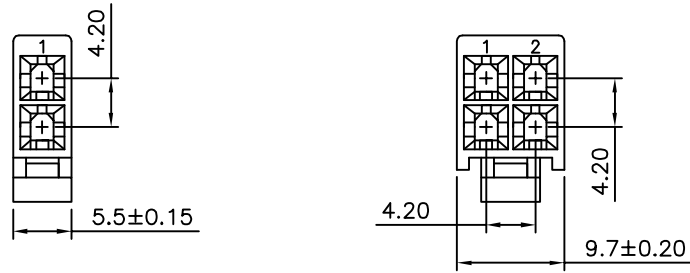

⚠
⚠

Circuits	A	B	Tolerance
2		5.5	A±0.20
4	4.20	9.7	
6	8.40	13.9	B±0.30
8	12.60	18.1	A±0.30
10	16.80	22.3	
12	21.00	26.5	
14	25.20	30.7	
16	29.40	34.9	B±0.40
18	33.60	39.1	
20	37.80	43.3	A±0.40
22	42.00	47.5	
24	46.20	51.7	B±0.50



DRAWING No.

02225

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
 X. ±0.5
 .X ±0.25
 .XX ±0.2
 .XXX ±0.08

⚠ A4

Modify Data

HZF

01/12/2010

⚠ A3

Modify Data

HZF

11/14/2009

⚠ A2

Modify Data

HZF

10/20/2009

⚠ A1

Add Spec.

BECKY

2004/11/18

⚠ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE

SCALE

NONE

REV.

A4

UNIT mm



NO. REV.

REVISIONS

CHK

DATE