
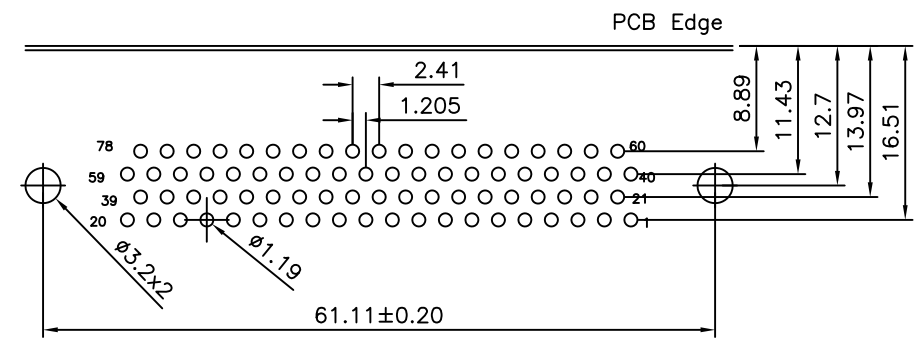
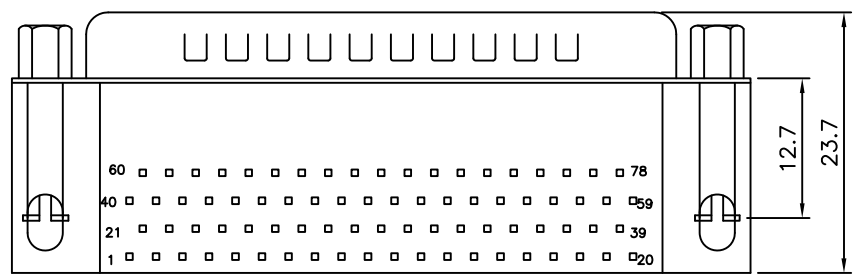
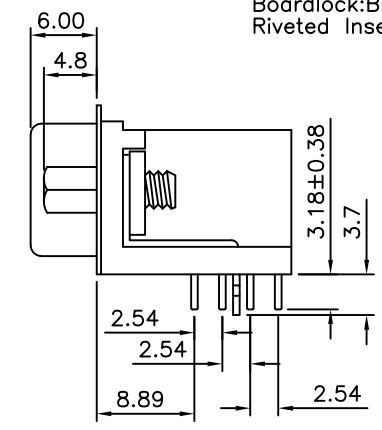


**SPECIFICATION**

Current Rating:2Amp  
 Dielectric Withstanding Voltage:1000V AC For 1Minute  
 Insulation Resistance:1000Megohms Min At 500V DC  
 Contact Resistance:15Milliohms Max  
 Operating Temperature:-55°C~+105°C  
 Insulator:PBT UL 94V-0  
 Contact:Copper Alloy  
 Contact Finish:Gold On Mating End Tin On Termination End  
 With Entire Contact Nickel Underplated  
 Shell:Steel  
 Boardlock:Brass Tin Plated  
 Riveted Insert:Brass Nickel Plated

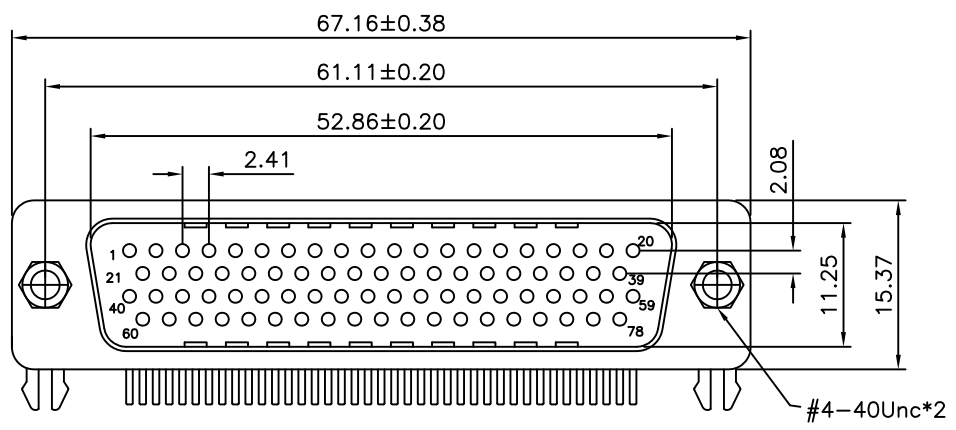

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
18744		MEI		TOLERANCES ARE					
		CHECKED BY		.X ±0.25					
		HZF		.XX ±0.15					
		DRAWING BY		.XXX ±0.05					
		JLT		ANG: ±1°					
SCALE	NONE	REV.	A0	UNIT	mm	AO	NEW RELEASE	HZF	04/30/2007
						NO.REV.	REVISIONS	CHK	DATE