File No.	387	SHEET	1 / 1

MATERIALS

Insulator: PBT+30% Glass Fiber(UL 94V-0),Black
Contact Material: Brass
Contact Finish: Gold Flash On Mating End,Tin-Lead On Termination End,With Entire Contact Nickel Underplated
Shell Finish: Steel Nickel Plated

SPECIFICATIONS

Current Rating: 2 Amps
Dielectric Withstanding Voltage: 1000V Per Minute
Insulation Resistance: 1000 Megohms Min.At 500V DC
Contact Resistance: 15 Milliohms Max. 10 Seconds
Operating Temperature: -55℃ To +105℃

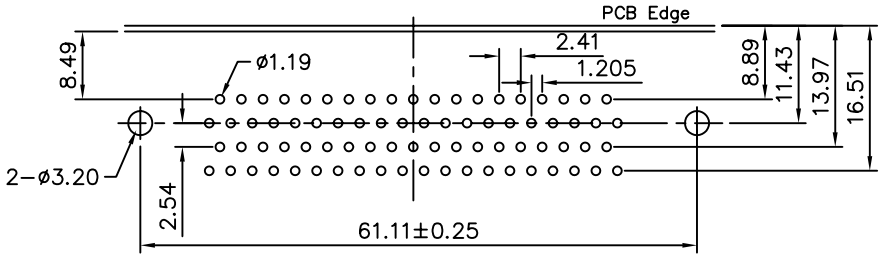

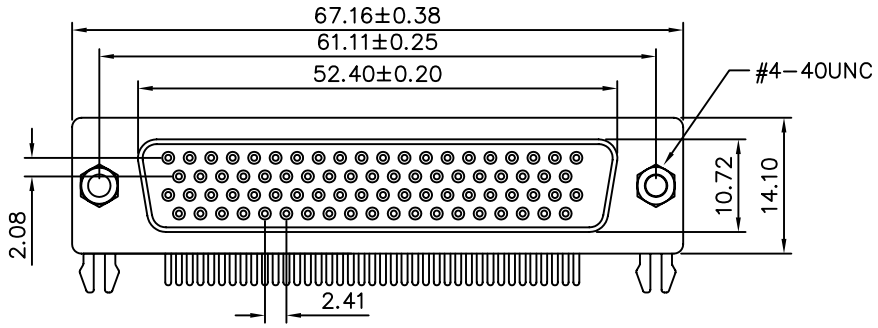

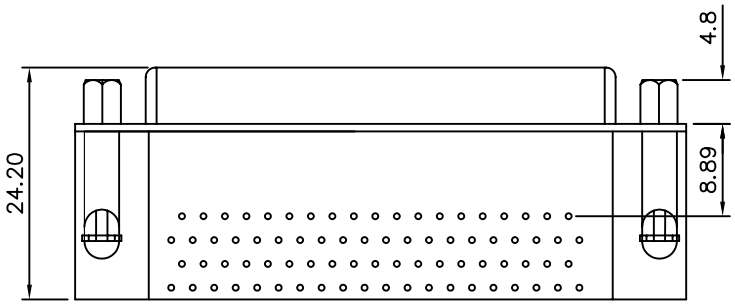

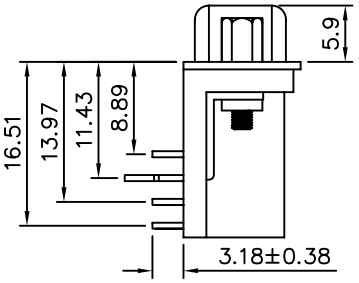

www.yektaelectronic.com

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
15774	MEI	.X ±0.25
	CHECKED BY BECKY	.XX ±0.15
	DRAWING BY HZF	.XXX ±0.05
		ANG. ±2°
SCALE NONE	REV. A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	BECKY	2004/10/01