File No.	112EC26226	SHEET	1/1

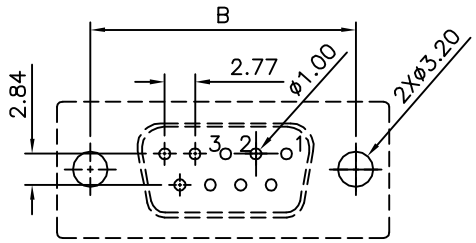

Recommended P.C.B. Layout

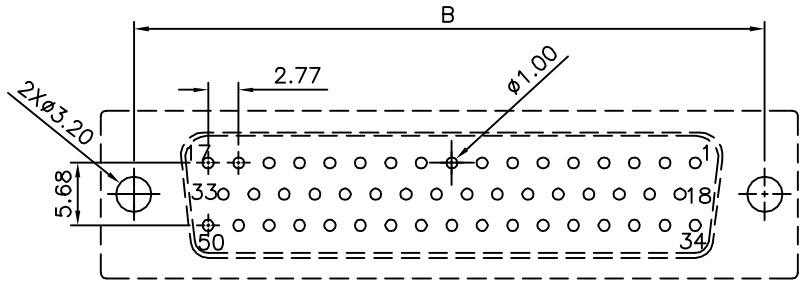

Recommended P.C.B. Layout

SPECIFICATION

Current Rating:1A Max.
Dielectric Withstanding Voltage:500V AC
For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At DC 500V
Temperature Range:−55°C~+105°C
Housing:PBT(UL94V−0),White
Contact:Brass,Gold Flash Over All,Over Nickel
Front Shell:Cold Rolled Steel,Nickel Plated Over Copper
Back Shell:Cold Rolled Steel,Tin Plated Over Copper
RoHS Compliant

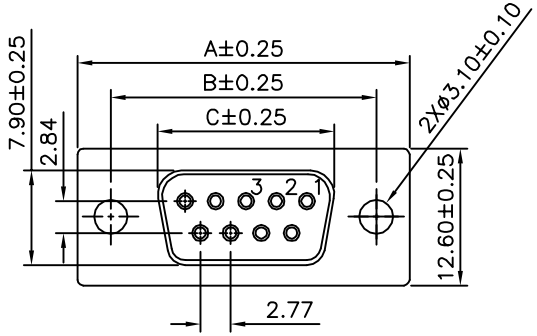

09,15,25,37P

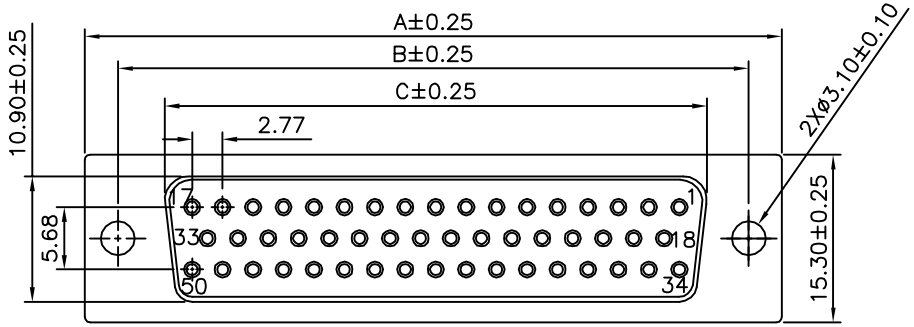

50P

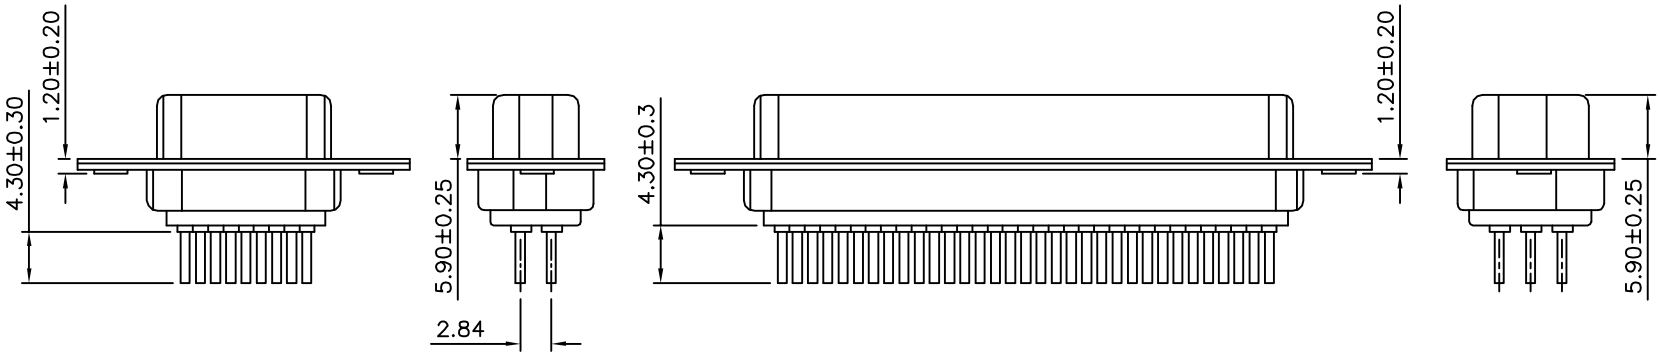

Pin	A	B	C
09	30.80	25.00	16.30
15	39.20	33.32	24.70
25	53.05	47.04	38.40
37	69.40	63.50	54.80
50	67.10	61.00	52.20

www.yektaelectronic.com

DRAWING No.	APPROVED BY	CHECKED BY	DRAWING BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
02899	MEI	HZF	SONG	.X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±1°

SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	03/19/2012