File No.	112DK23226	SHEET	1 /1

1 SPECIFICATION
Current Rating:1A Max
Dielectric Withstanding Voltage:500V(AC) For 1 Minute
Contact Resistance:30 Milliohms Max
Insulation Resistance:1000 Megohms Min At DC 500V
Temperature Range:−55°C~+105°C
RoHS Compliant

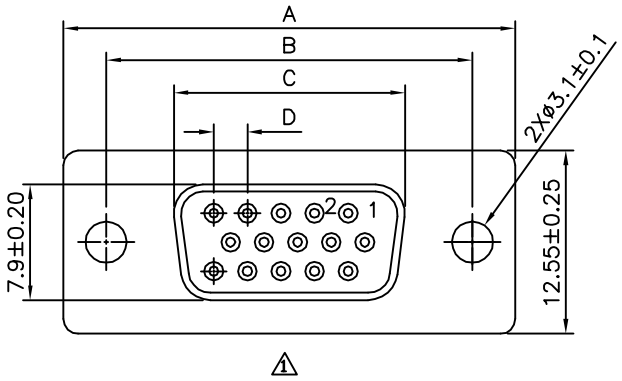

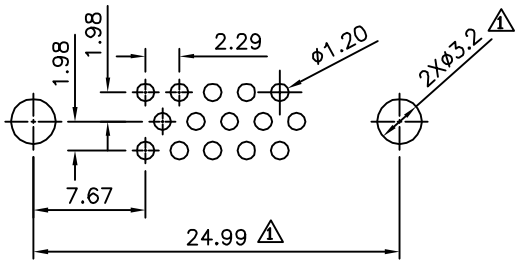

Recommended P.C.B. Layout
15 Pin

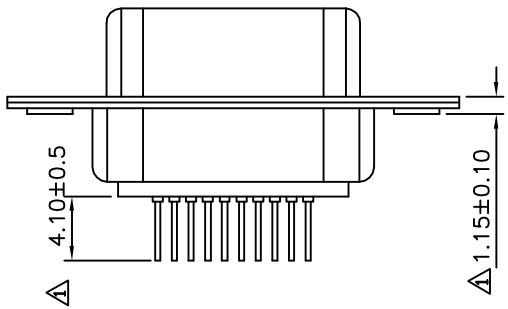



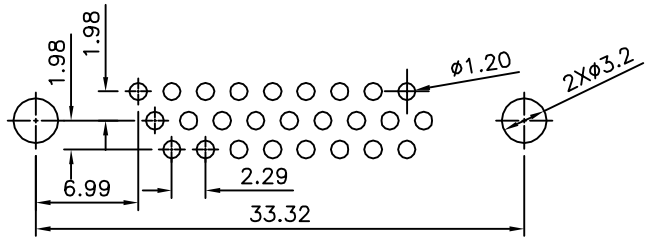

Recommended P.C.B. Layout
26 Pin

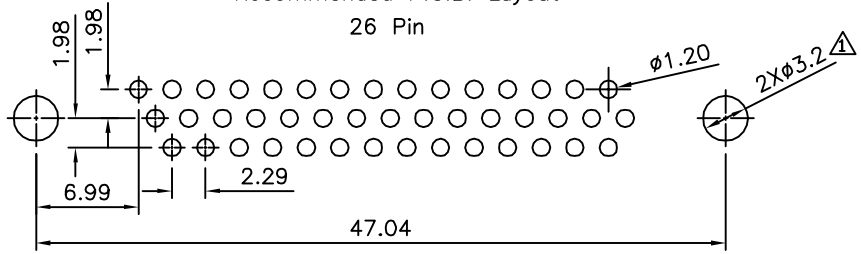

Recommended P.C.B. Layout
44 Pin

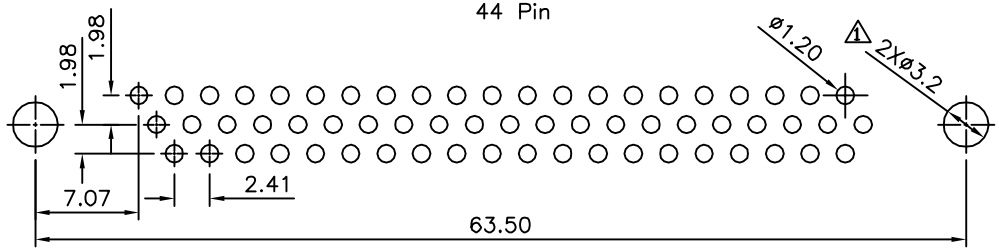

Recommended P.C.B. Layout
62 Pin

1

Pin	A±0.25	B±0.20	C±0.20	D±0.05
15	30.81	24.99	16.33	2.29
26	39.25	33.32	24.66	2.29
44	53.04	47.04	38.38	2.29
62	69.50	63.50	54.84	2.41

1

No.	Name	Q'ty	Material	Remarks
4	Back−Shell	1	Cold Rolled Steel	Tin Plated
3	Front−Shell	1	Cold Rolled Steel	Nickel Plated
2	Contact	15~62	Copper Alloy	Gold Flash Over Nickel
1	Insulator	2	PBT,UL94V−0	White

www.yektaelectronic.com

DRAWING No.		APPROVED BY	EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.20 .XXX ±0.100 ANG. ±1°
02679		CHECKED BY	HZF	
		DRAWING BY	YBL	
SCALE	NONE	REV.	B1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	B1	Modify Data	HZF	11/23/2013
0	B0	NEW RELEASE	HZF	11/18/2008