File No.	697DJ04806	SHEET	1/1

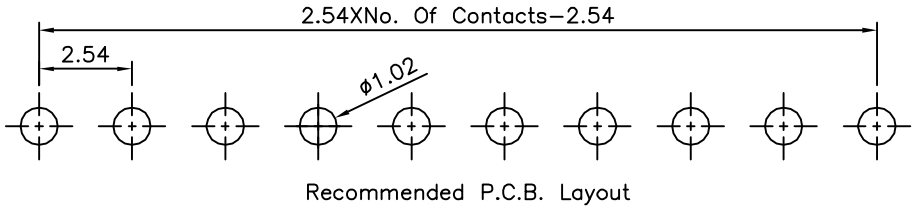

Recommended P.C.B. Layout

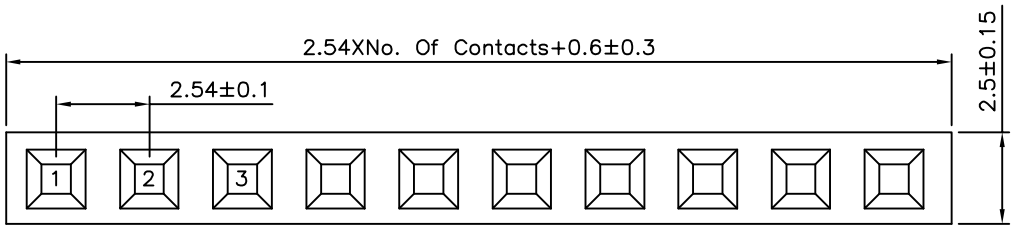

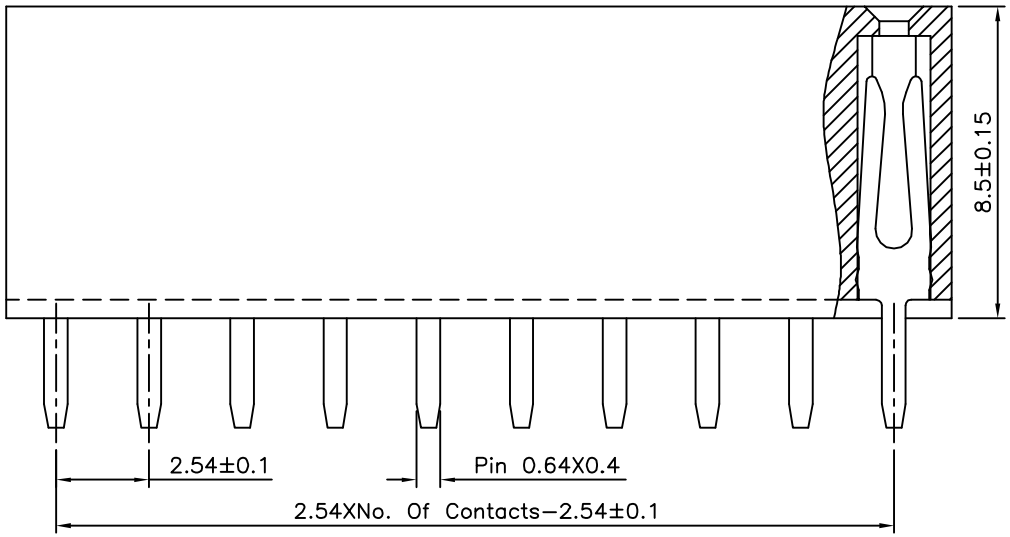

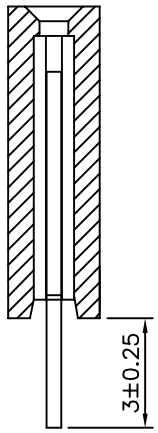

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant

www.yektaelectronic.com

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	NO.	REV.	REVISIONS	CHK	DATE
00523	EMILY	X. ±0.25 X.° ±2°					
	CHECKED BY HZF	.X ±0.20 .X° ±1.5°					
	DRAWING BY SONG	.XX ±0.15 .XX° ±1°					
		.XXX ±0.10 .XXX° ±0.5°	0	A0	NEW RELEASE	HZF	04/04/2013
SCALE NONE	REV. A0	UNIT mm					