

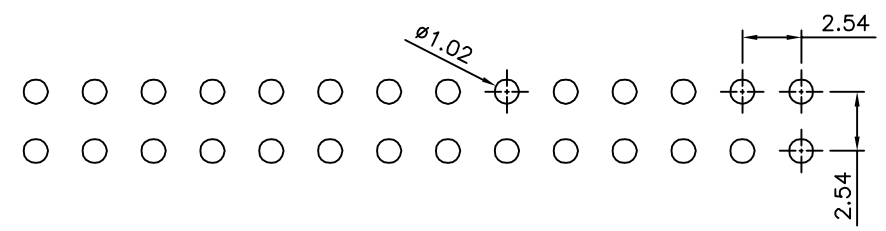


**△△ SPECIFICATION**


Current Rating:3.0 Amp  
 Withstand Voltage:1000V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Plated Over Nickel  
 Insulator:PA9T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

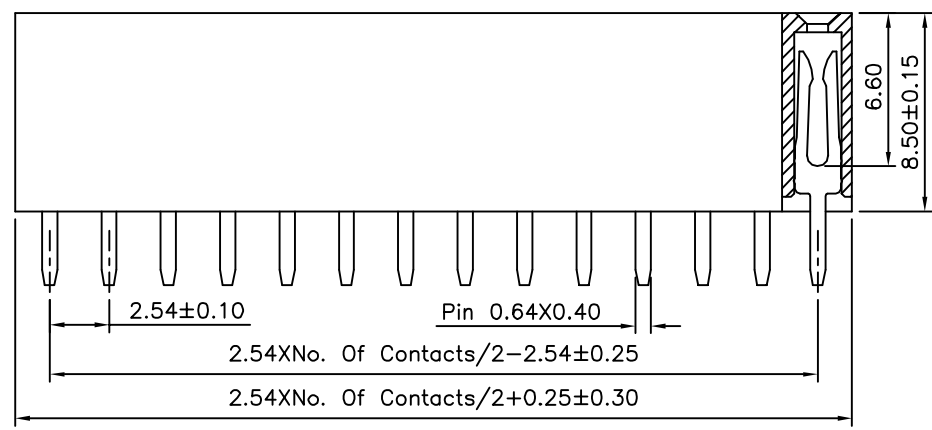

Recommended P.C.B. Layout(Top Side)  
 (PCB Board Tolerance±0.05)

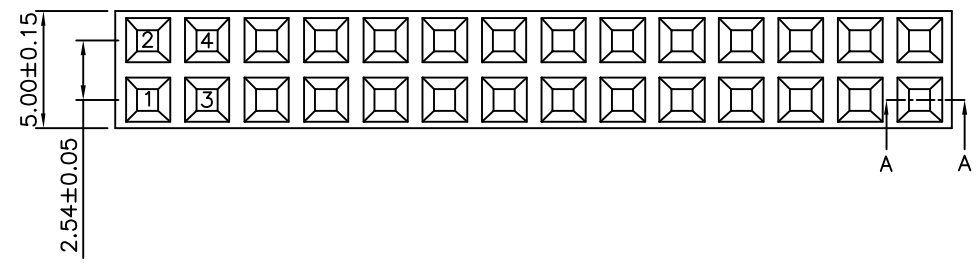

Section A-A

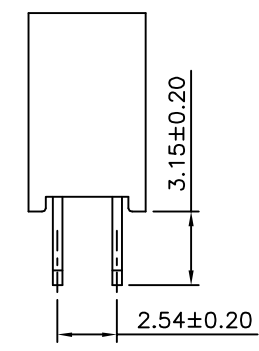

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°					
00606		EMILY			△ A2	Modify Data	HZF	10/08/2012	
		CHECKED BY			△ A1	Modify Data	HZF	11/14/2009	
		DRAWING BY		△ A0	NEW RELEASE	HZF	09/14/2008		
SCALE	NONE	REV.	A2	UNIT	mm	NO.REV.	REVISIONS	CHK	DATE

