
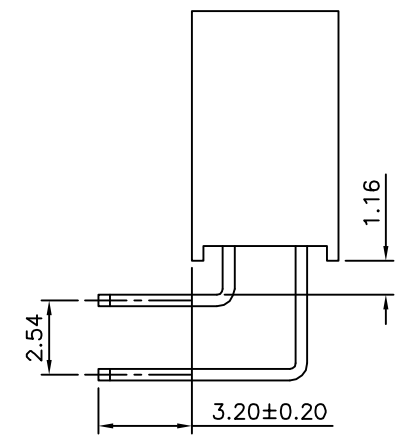
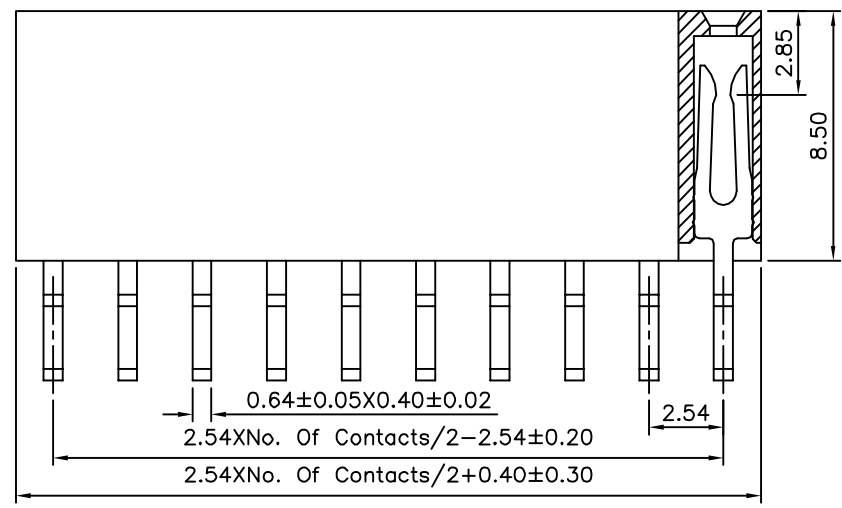


Recommended P.C.B. Layout

**SPECIFICATION**

Current Rating:3 Amps/Contact Max.  
 Withstanding Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max./Contact  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Contact:Brass,Gold Plated Over Nickel  
 Insulator:PA6T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

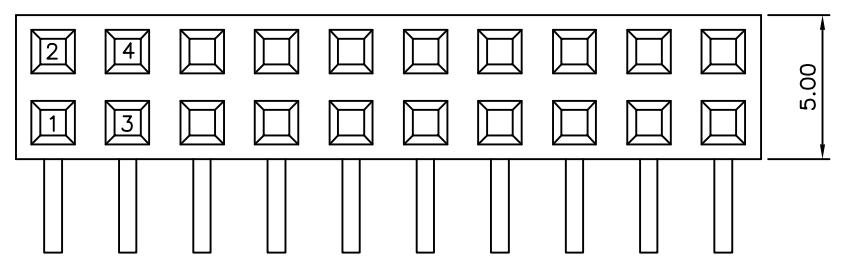

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°
00664		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		YBL		
SCALE	NONE	REV.	A0	NO.

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	05/20/2013