


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06		

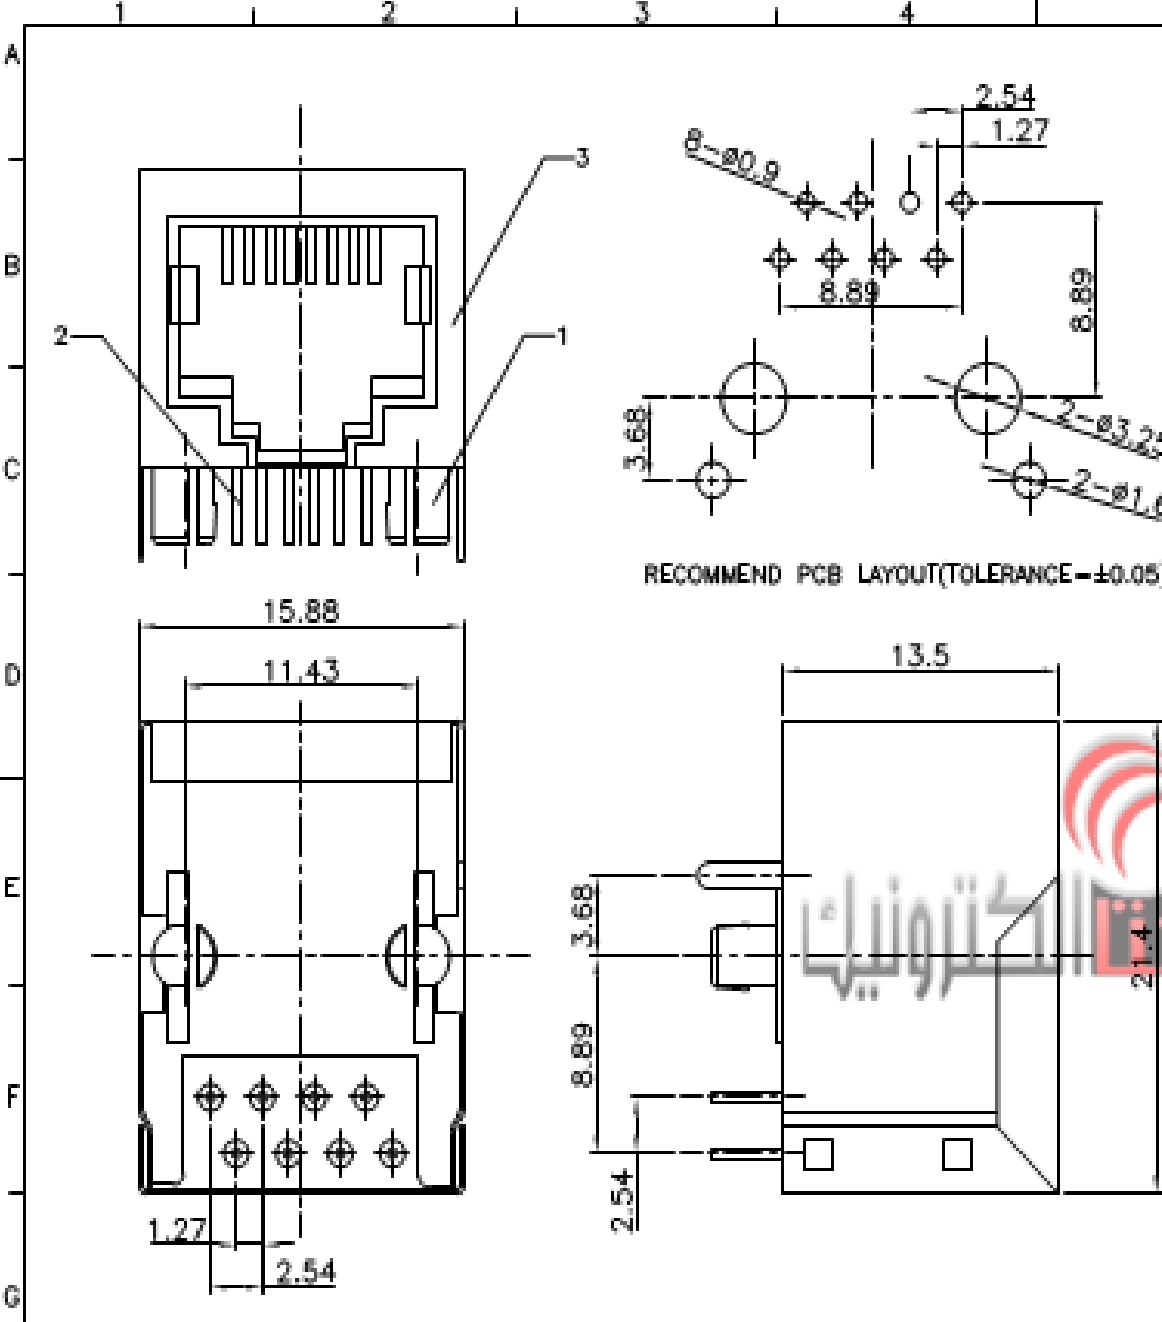

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V,AC/Minute.
3. Durability:600 Cycles Min.
4. Product Number Code:

YE 1128-X X X X X

- Housing Materials
P:PBT
N:NYLON
- Housing Color
B:Black
- Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
- No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
- Connector Type
S:Socket
- Series No.
YE1128



No.	PART NAME	Q'ty	MATERIAL	REMARK
(3)	SHIELDING	1	COPPER ALLOY	0.20mm THICKNESS
(2)	PIN	1	PHOSPHOR BRONZE	GOLD PLATING
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	C-YE1128-XXXX

PROJECTION	TITLE
UNITS mm	PCB JACK 8P 1PORT
SHEET SIZE A4	SERIES YE1128 SERIES

شرکت یکتا الکترونیک

