

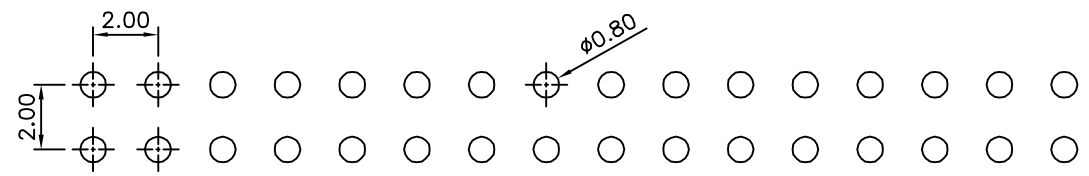


SPECIFICATION


Current Rating:1.5 Amp/Contact
 Withstand Voltage:450V AC/Minute
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Soldering Temperature:+260°C Max.
 Mechanical Life Cycle:200 Min.
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 No. Of Contacts:04~80 Cotnacts
 RoHS Compliant

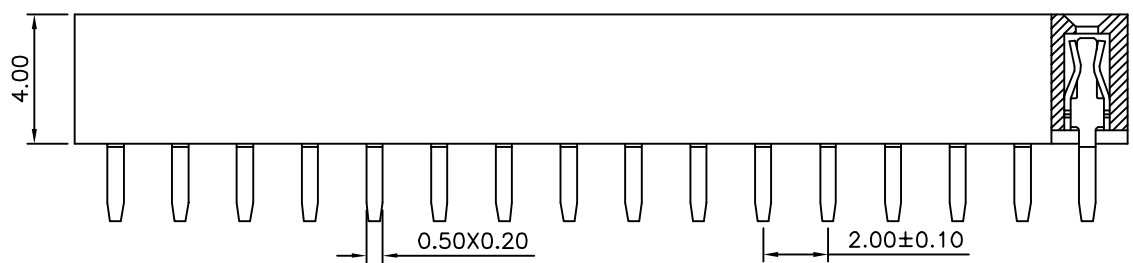

Recommended P.C.B. Layout

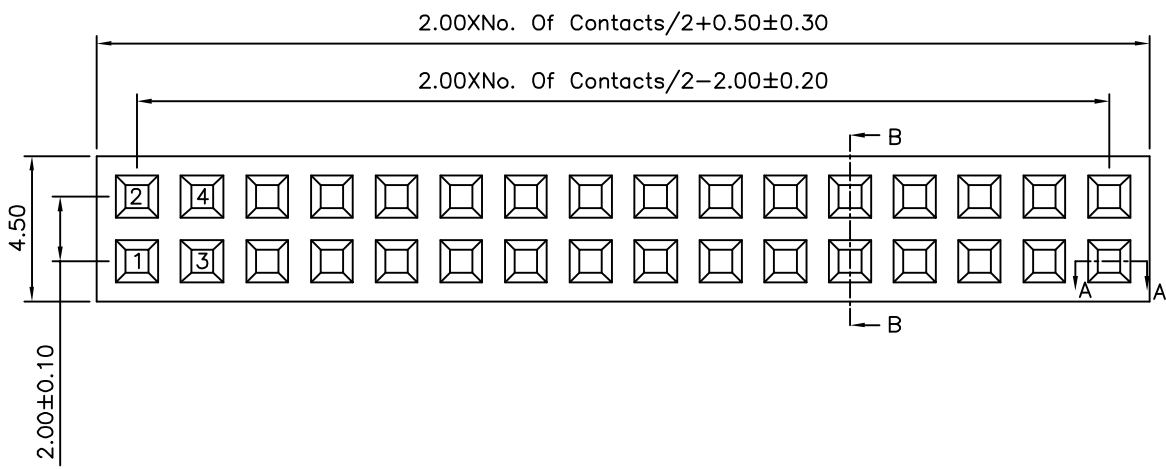

Section A-A



Section B-B



DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°
17430		EMILY		
		CHECKED BY HZF		
		DRAWING BY GAO		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	11/30/2011